

SOLENOID OPERATED - OIL RESERVOIRS

Material - BRASS Bottle - GLASS Finish - NICKEL

Seals - FIBRE & NITRILE 80

Maximum operating temperature: 80°C

Electrical rating: 14VA IP20 (DIN400 50)

Product Code	A	B mm	C mm	D mm	E mm	Capacity ml
GRS 260	1/4 BSP					
GRSN 260	1/4 NPT	150	14	60	60	140
GRS 268	1/4 BSP					
GRSN 268	1/4 NPT	170	14	80	60	200
GRS 280	1/4 BSP					
GRSN 280	1/4 NPT	210	14	100	80	400
GRS 2100	1/4 BSP					
GRSN 2100	1/4 NPT	250	14	120	100	900
GRS 2133	1/4 BSP					
GRSN 2133	1/4 NPT	295	14	150	133	1900
GRS 2150	1/4 BSP					
GRSN 2150	1/4 NPT	325	14	180	150	3000

The following voltages are available:

12V DC, 24V DC, 24V AC, 110V 50Hz, 230V 50Hz, 415V 50Hz

When ordering, please state voltage required.



Material - BRASS Bottle - PLEXIGLASS Finish - NICKEL

Seals - FIBRE & NITRILE 80

Maximum operating temperature: 70°C

Electrical rating: 14VA IP20 (DIN 400 50)


Product Code	A	B mm	C mm	D mm	E mm	Capacity ml
PRS 260	1/4 BSP					
PRSN 260	1/4 NPT	150	14	60	60	140
PRS 268	1/4 BSP					
PRSN 268	1/4 NPT	170	14	80	60	200
PRS 280	1/4 BSP					
PRSN 280	1/4 NPT	210	14	100	80	400
PRS 2100	1/4 BSP					
PRSN 2100	1/4 NPT	250	14	120	100	900
PRS 2133	1/4 BSP					
PRSN 2133	1/4 NPT	295	14	150	133	1900
PRS 2150	1/4 BSP					
PRSN 2150	1/4 NPT	325	14	180	150	3000

Timer for use with GRS/PRS shown on page number 15

The following voltages are available:

12V DC, 24V DC, 24V AC, 110V 50Hz, 230V 50Hz, 415V 50Hz

When ordering, please state voltage required.

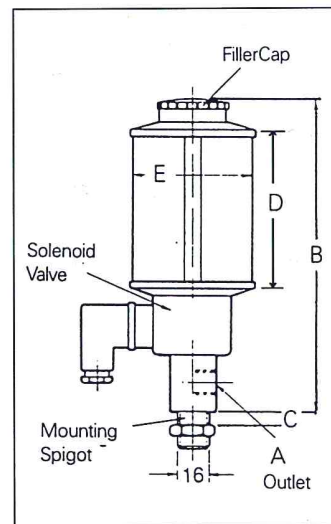

MOUNTING BRACKET - To suit most drip feed lubricators

Product Code	A mm	B mm	C mm	D mm	E mm	F mm	G mm	I mm
MWI 90	90	80	80	50	25	21	20	3
MWI120	120	80	80	50	25	21	20	3

Material - STEEL Finish - ZINC PLATED

STANDARD FIXING THREAD M16x1.5

