


## PUMP ONLY

This self priming electromagnetic pump has been designed for intermittently operated single line lubrication systems using light to medium machine and chain oils. The electric pump can be controlled by an existing machine control or by our LVT series timer with an adaptor.

Maximum Pressure: 1.5 bar, at approx 10 Mtrs  
 Output: 21 cc/min  
 Electrical rating: 18.5W IP65  
 Maximum temperature: 40°C  
 Inlet thread: 1/8" BSP Male  
 Outlet thread: 1/8" BSP Female

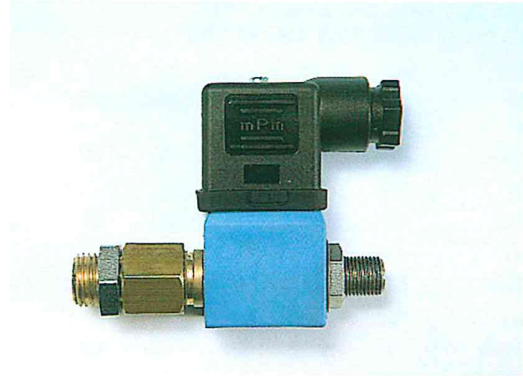

Material - BRASS - PLASTIC  
 Finish - NATURAL BRASS

Product Code	A BSP	B mm	C mm	D mm	E BSP	F mm	G mm	H BSP
EPT 200	1/8"	69	58	22	1/4"	10	12	1/8"

The following voltages are available: 24V 50HZ, 42V 50HZ, 48V 50HZ, 110V 50HZ, 220V 50HZ, 220V 60HZ. When ordering please state voltage required.

The pump EPT is for INTERMITTENT use only.

**The following operating instructions should be followed.**

**CONTINUOUS, INTERMITTENT AND SHORT TIME DUTY:**

(On-time 0.5, sec to max 90, sec).

Within this range, a continuous signal is ensured provided that the OFF time is equal to the ON time. For example: 60, sec ON and 60, sec OFF.

**SHORT TIME DUTY:** (On-time 90, sec to max 150, sec).

Within this range the OFF time must be twice as long as the ON time. For example: 120, sec ON and 240, sec OFF.

